



Bristol LED Outdoor Sconce BSSW Series

Features

All purpose LED porch light is an energy saving long-lasting alternative to incandescent. Ideal use for security and general lighting. Provides lighting in residential, commercial, and hospitality applications. Fixture mounts to standard junction box (not included).

Construction

Housing is die cast 22-gauge aluminum. Power supply must be made inside junction box.

Finish

All exposed metal surface area is painted black finish.

Diffuser

Frosted white acrylic panels.

Electrical

Input voltage: 120VAC / 60Hz
Photocell control light operation switching on at dusk and shut off at dawn (PC-50 model only).

LED

Integrated LED modules.
50,000 hrs., 80 CRI
Operating temperature -20° C (-4°F) to 40° C (104° F)

Certification


cETLus certified for wet locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

**Specifications and dimensions
subject to change without notice.**

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

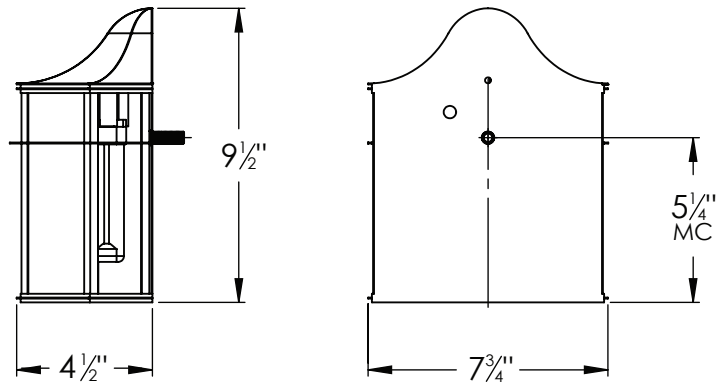

MC - Mounting Center

Ordering Information:

Black with Photocell	LED	Source Lumens	CCT	H	W	D
BSSW0810700L50BKPC-50	9W	700	5000K	9-1/2"	7-3/4"	4-1/2"

Black	LED	Source Lumens	CCT	H	W	D
BSSW0810700L50BK	9W	700	5000K	9-1/2"	7-3/4"	4-1/2"
White	LED	Source Lumens	CCT	H	W	D
BSSW081009L30ENWH	12W	900	3000K	9-1/2"	7-3/4"	4-1/2"