


Independence Line®

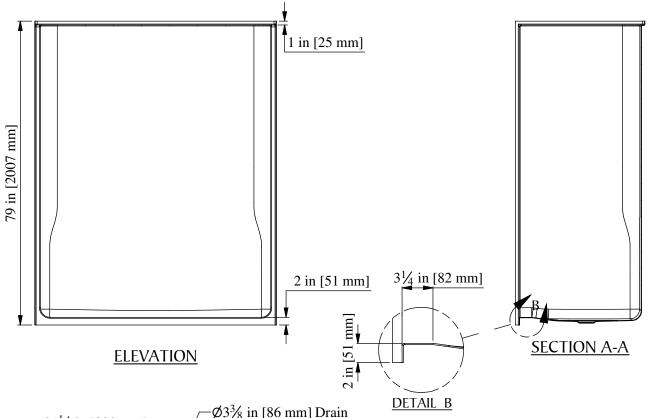

33½ in [800 mm]

A

63 in [1600 mm]

PLAN

63" [1600mm] Barrier-Free Shower w/ 2" [51mm] Threshold

CENTER DRAIN

PRODUCT SPECIFICATIONS:

- Product material AcrylixTM surface with fiberglass composite reinforcement.
- Barrier-Free installation requires a 2" recess.
- Special installation instruction for this unit must be followed carefully.
- Certified to meet CSA B45.5/IAPMO Z124 Standard.
- This unit can be reinforced to meet the accessibility requirements for Type B dwellings upon request.
- When properly accessorized and installed, product will meet requirements of ADA (2010 Std), ICC/ANSI A117.1-2017, ABA or UFAS.
- Product has a Class B fire rating as determined by ASTM E-84 test method.
- Reinforced & slip resistant floor.
- Integral 1" [25mm] nailing flange.
- Shower Area: W- 60" [1524mm] x D- 31-1/4" [794mm]
- Compartment Opening: W- 60" [1524mm] x H- 75-3/4" [1924mm]
- A shower door is only recommended if using our 2"x2" Acrylic Threshold.
- All dimensions =/- 1/2" [12.8mm]
- Clarion Bathware reserves the right to change design and/or dimensions.
- Dimensions are the same for RE, MP, and all other versions of this model.

6333BF

63" [1600mm] Barrier-Free Shower w/ 2" [51mm] Threshold & Center Drain

Clavion BATHWARE 44 Amsler Ave. Shippenville, PA 16254

Phone: (814) 226-5374 Toll Free: (800) 576-9228 Fax: (814) 226-0730 www.clarionbathware.com

Signatures For Approval:	Date:	DWG. #
Customer:		6333BF -CUT
Arch./Engr:		
Quote #:		By: CAL
Job Name:		Date: 5/27/2021

IMPOTANT NOTICE