


DEMD Series Electronic Solar Lavatory Faucets

HDF[®]
COMMERCIAL

DELTA[®]

DEMD-320LF (SINGLE TEMPERATURE FAUCET)

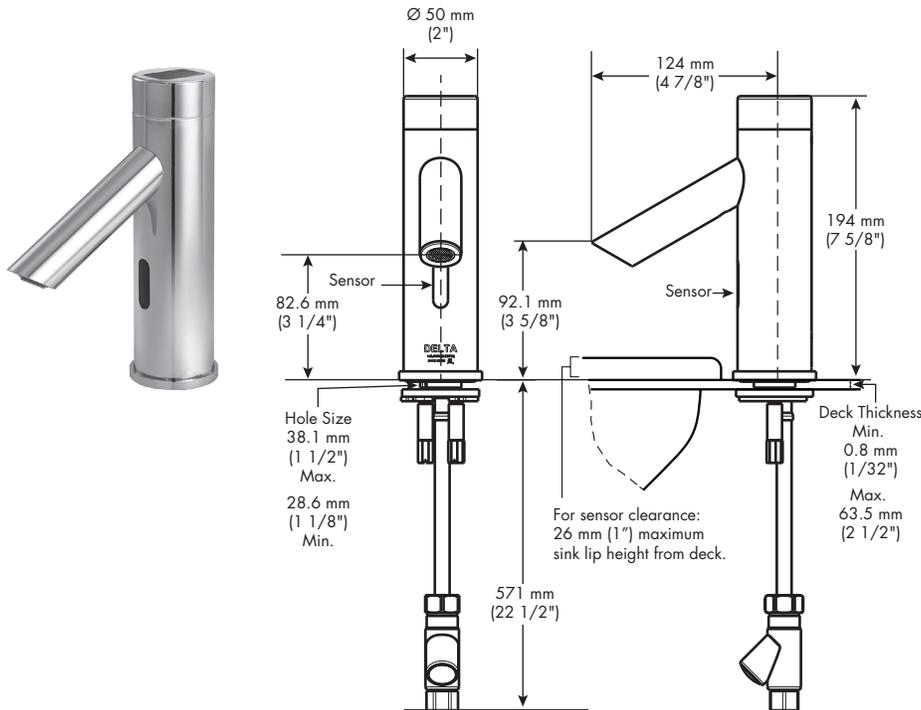

SPECIFICATION: (EXAMPLE)

- Solar powered user-activated infrared sensor
- Above deck serviceable components
- Sensor detects user's hand to activate water flow
- Solid brass design, chrome finish
- Designed for indoor lighting conditions and will operate in high or low brightness levels
- Compatible in environments with occupancy lighting
- Four 1.5V 'AA' alkaline batteries, above deck (required and included)
- Low battery indicator
- Auto shut-off after 30 seconds
- Vandal resistant concealed aerator
- 0.5 gpm (1.9 L/min) flow control spray aerator

□ DEMD-320LF

- Electronic faucet for cold or pre-mixed water
- Single temperature
- Built-in check valve and in-line filter

□ DEMD-321LF

- Electronic faucet with integrated mixer to adjust temperature
- Built-in check valves and in-line filters

OPERATION

Sensing Range:


- Factory set to 6" to 8" (153 mm to 203 mm)
- Sensor clearance: 26 mm (1") maximum sink lip height from deck

OPTIONAL ACCESSORIES (Order Separately)


□ 061269A

- 4" (102 mm) Coverplate

DEMD-321LF (ADJUSTABLE TEMPERATURE FAUCET)

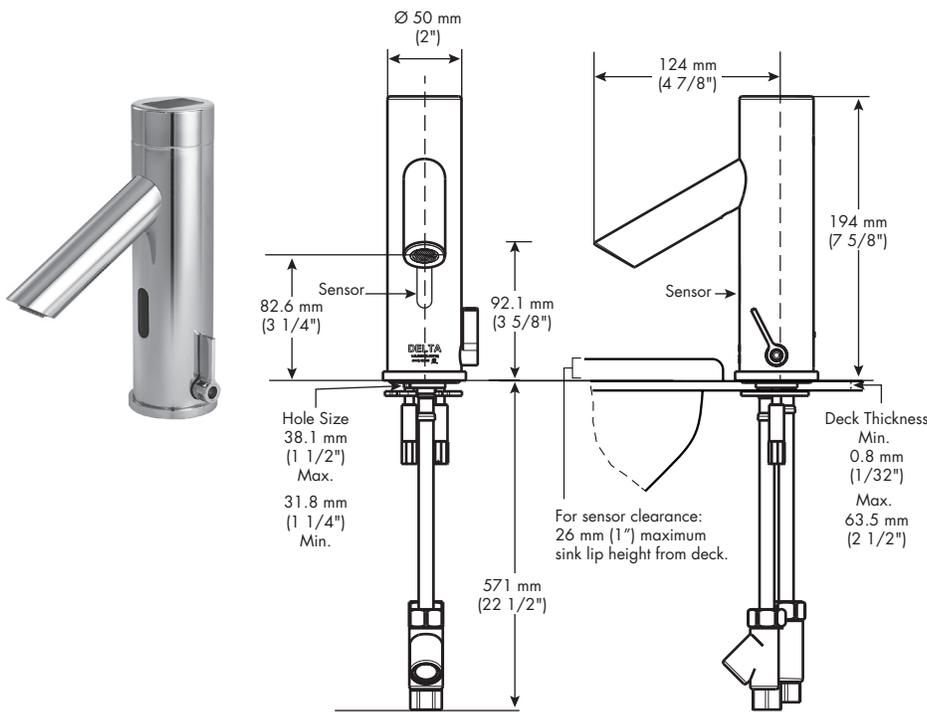

FLOW RATE vs PRESSURE

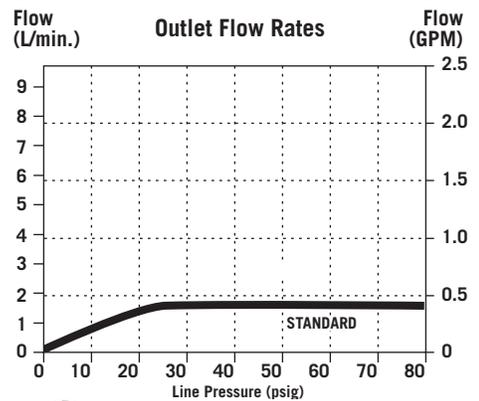

APPROVALS:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 – Valve actuation only
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

Note: Measurements may vary \pm 6mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-DEMD 320 Rev. B