

Collection:Miro


Installation manual for:

 $LD6015D20 \quad {\tt D20''H11.75''} \ {\tt L3}$

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in side of top unit the mounting bracket.
- 6. Hang the lamp body to the chain(P8) and connect the canopy lock(P7).
- 7.Put the canopy(P3) on the nipple(P4) and connect the canopy lock(P7),then use the canopy ring(P6) to screw tighten.
- 8.Install E26 light source, no include bulb.

The end!

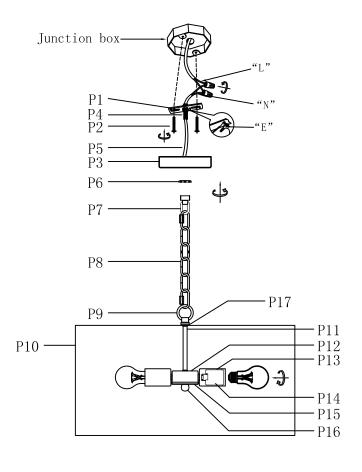

PARTS LIST

part	picture	Description	Qty	Check list
P1	— • —	L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
Р3		D4.7" Canopy plat	1	
P4		Nipple	1	
P5		Power Cord 7.7', 18AWG, SPT-1 Gold/Black	1	
Р6	-	Canopy ring	1	
Р7	₽	Canopy lock	1	
P8	~~~~	L5'CHAIN04P Plain Design	1	
Р9	Q	D1.5" Loop	1	
P10		D20"*H10" Lamp shade	1	
P11		L3.23" Both end threaded pipe	1	
P12		D2.36" Metal Wire Box	1	
P13		Socket cover	3	
P14		E26 Socket	3	
P15		D2.48" Wire Box	1	
P16	(Cap nut	1	
P17		Washer	1	

"L" = Hot wire

"N" = Neutral wire

 $^{\prime\prime}E^{\prime\prime}$ = Ground wire