

Ellis Harper Linear Chandelier

6613705 | 1.0

GENERATION LIGHTING

CHANDELIER

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

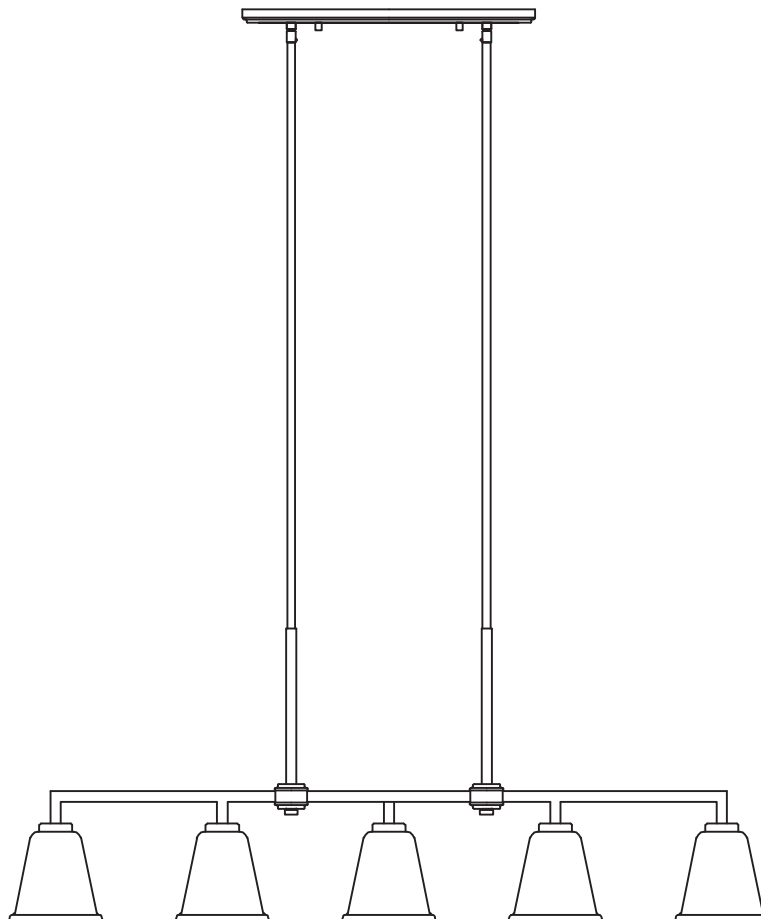

SAVE THESE INSTRUCTIONS!

Install the Fixture

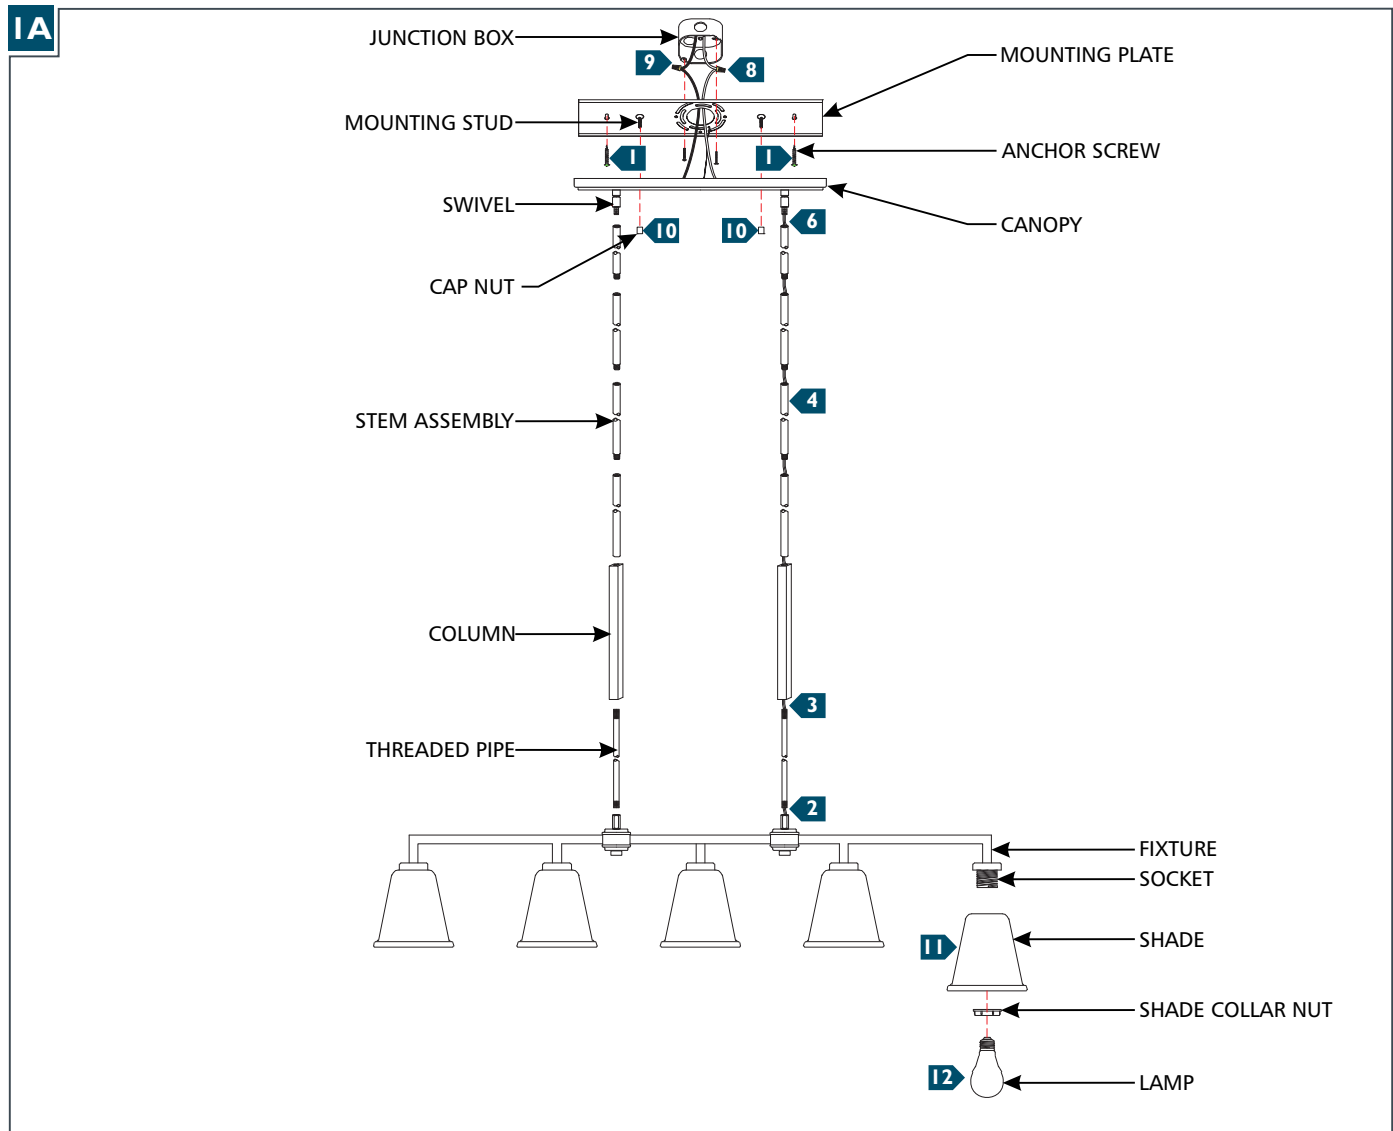

- 1** Secure the mounting plate to the junction box and ceiling using the provided anchor screws.
- 2** Feed the fixture wires through threaded pipe, then screw the threaded pipes to the top of the fixture.
- 3** Feed the fixture wires through the column, then slide the columns over the threaded pipes.
- 4** Determine the wanted height or look of the fixture with the provided stems and assemble them by screwing them together. All parts may be used alone or in used in combination.
- 5** Feed the fixture wires through the stem assembly, then screw the stem assemblies onto the threaded pipes.
- 6** Feed the fixture wires through the swivel and canopy, then screw the swivels onto the stem assemblies.
- 7** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 8** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 10** Neatly place all the wires into the junction box, place the canopy onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.
- 11** Place the shade over the socket and secure it in place by screwing the shade collar nut onto the socket. Repeat for remaining shades.
- 12** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.