



- GBF1635** Barrier-Free Emergency Shower, Vertically Mounted, Plastic Shower Head
- GBF1635SSH** Barrier-Free Emergency Shower, Vertically Mounted, Stainless Steel Shower Head

Application: Barrier-Free emergency shower for vertical mounting. Unit should be installed so that shower head is at least 82" above floor and 32" from wall or nearest obstruction.

ADA Compliance: When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach and distance from obstructions).

Shower Head: 10" diameter orange ABS plastic (GBF1635) or stainless steel (GBF1635SSH), with 20 GPM flow control.


Valve: 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals. Furnished with stainless steel actuating arm and 59-1/2" stainless steel pull rod.

Supply: 1" NPT female inlet.

Sign: ANSI-compliant identification sign.


Available Options

- G6040** Thermostatic mixing valve precisely blends hot and cold water to deliver tepid water as required by ANSI Z358.1-2014. Refer to "Thermostatic Mixing Valves" section for complete technical and product selection information.
- GRN** Green ABS plastic shower head.
- YEL** Yellow ABS plastic shower head.

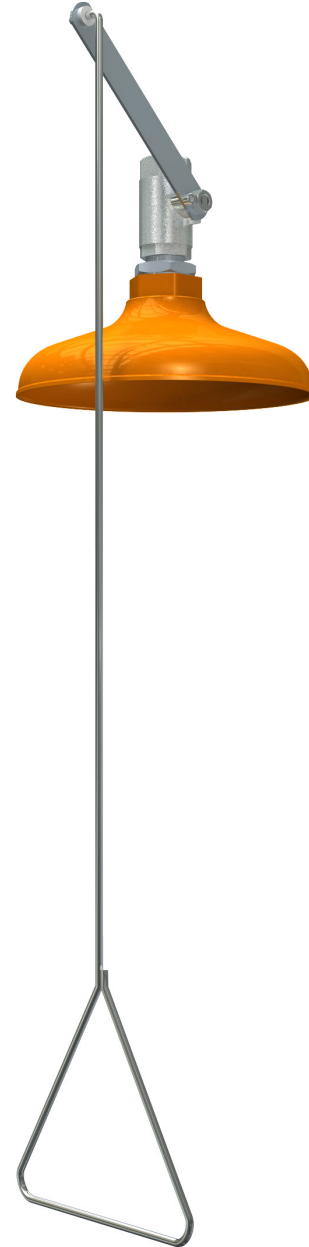



- GBF1635 Barrier-Free Emergency Shower, Vertically Mounted, Plastic Shower Head
- GBF1635SSH Barrier-Free Emergency Shower, Vertically Mounted, Stainless Steel Shower Head

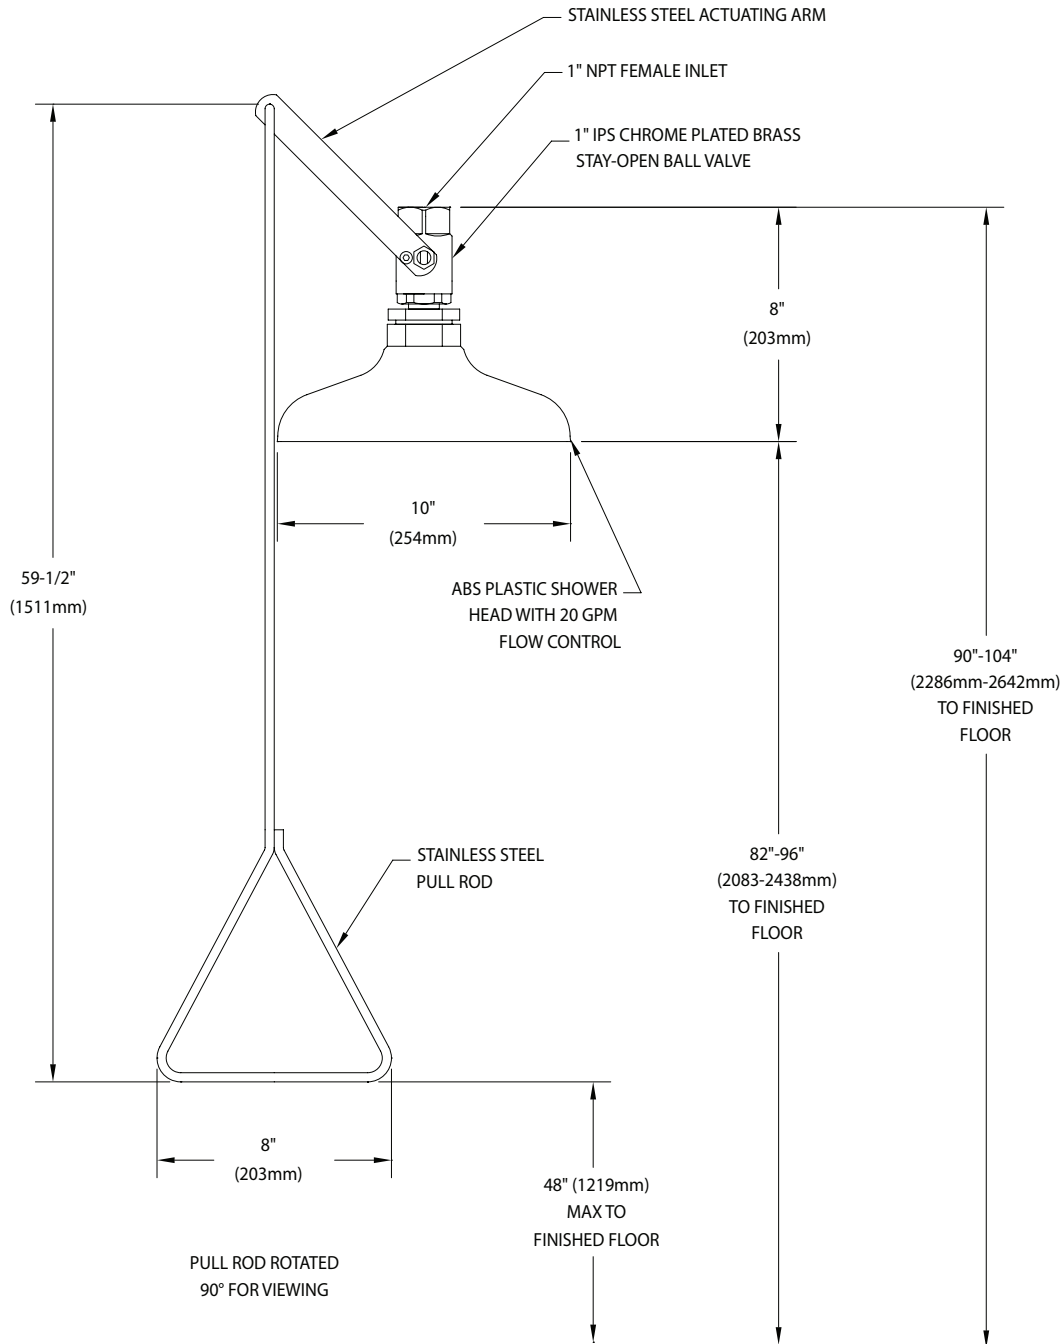

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4"$ (6mm). rev. 1017

