
by Hamilton Bathware

HMT6236TR 1.125

Without Seat

CUSTOMER: _				One Signature Required
JOB NAME: _ PO #: _	QUOTE #	PL	UMBING CONTRACTOR APPROVAL	//
DATE: _	QUANTITY: L R	G	//	
SHIP TO:			ENGINEER APPROVAL	/ _{DATE} /
-			ARCHITECT APPROVAL	// DATE /
	To complete your order, this document must be signed a quotes@americanbathgre			
CTANIDADD	·	-		
	FEATURES	Int. Dim.	60 W x 34 D x 76 ¾ H	
 Pre-leveled 		Ext. Dim.	66 W x 36 ½ D x 78 3/4 H	
 AcrylXTM c 	applied acrylic surface	Skirt Ht.	1 1/8 skirt	
- 1 1/8" skirt		Packaged Wt.	210 lbs.	
- Compliant	t when properly installed	Material	AcrylX™ applied acrylic	
- Center fro	nt drain outlet	Warranty	30-year warranty*	
- Integral fro	ont trench drain		* See terms and conditions for details	inches
	ited warranty			
$-12'' \times 24''$	subway tile	OPTIONAL :	ACCESSORIES (available for all m	odels)
	ant, textured bottom [ASTM F-462]		teel vertical bar 24" \times 11/2" (entry wa \square RH \square Both	II)
COV 15101 15	ATIONI	☐ Large soar	o dish (12 $\frac{1}{2}$ W × 3 $\frac{1}{2}$ D × 11 $\frac{1}{2}$ H), s	hipped loose
	ATION (handed by fixture wall)	☐ Small soap	o dish (7 W x 31/2 D x 111/2 H), shipp	ped loose
☐ Shell reinforced for future accessory installation Fixture wall ☐ LH ☐ RH ☐ Back wall			d, shipped loose	
		☐ Shower curtain, shipped loose		
□ Option	nal vertical bar reinforcement (entry wall)	☐ Brass drain		
_ п'ін		Colors:		
_	gured — ADA		☐ White	
	all (must choose one) □ LH □ RH □ Back Wall			
			☐ Biscuit ☐ Bone	1
	wo stainless steel 24" x 11/2" grab bars located on the		contact customer service for custom c	color options)
	and one stainless steel 48" x 11/2" grab bar located on	☐ Additional	accessories:	
	wall, per ADA guidelines. (std config)			
	-installed plumbing options per ADA requirements			
☐ Ho	and-held shower assembly, 30" slide bar and 60" hose			
☐ Pre	essure balancing mixing valve			
				$\overline{\gamma}$
CLICTON	OPTIONIC , ILLI (C.Z. C	FI I		/
CUSTOM C	OPTIONS (not available if ADA configuration is selected)			
Grab bars:				
☐ Horizo	ontal U-shaped bars: 24" (side walls), 48" (back wall)			
	al bar 24" (entry wall) 🔲 LH 🔲 RH 🔲 Both			
Grab Bar finis				
	ess steel (1½" dia.)			
	er-coated white (1½" dia.)			
	stalled plumbing options per ADA requirements			
	held shower assembly, 30" slide bar and 60" hose			
	re balancing mixing valve	И		
Fixture wa	ıll □ LH □ RH □ Back wall			
Grate:				
	ess steel			
☐ White				
☐ Tampe	er-proof			







by Hamilton Bathware

Without Seat

ADA/ANSI compliant when fully equipped and installed according to guidelines.



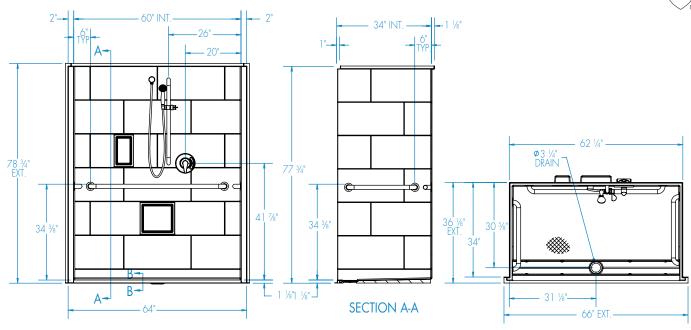



SECTION B-B Integral Pre-leveled Base trench grate (included), not shown

FEATURES Ibs Dimensional Tolerance ± %". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt.
Shower HMT6236TR 1.125	AcrylX™ applied acrylic	Smooth tile	1	Center Front	1 1/8″ skirt	200	210

DIMENSIONS

Specifications	inches (mm)
Width: Ext. / Int.	66 / 60
Depth: Ext. / Int.	36 1/8 / 34
Height: Ext. / Int.	78 ¾ / 76 ¾
Enclosure Opening:	60
Skirt Height:	1 1/8
Drain Rough-In (from Back Wall)	30 %
Drain Rough-In (from Side Wall)	31 1/8

FRAMING DIMENSIONS inches (mm)

Туре	D Depth	W Width	H Height	А	В	С
Alcove	34	62 1/4	-	Box Out	31 1/8	30 %

