

#### **Features**

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Vertical handle with inside knob on moving panel.
- Gently-curved towel bar provides integrated storage on fixed panel.
- Tempered glass ensures maximum safety and durability.
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.
- Smooth, easy-to-clean wall jambs.
- Full-length moving panel seal provides excellent water containment.
- Coordinates with other items in the Elate collection.

#### Material

- Frameless, heavy 5/16" (8 mm) thick Crystal Clear tempered glass with privacy band.
- Anodized aluminum prevents rust and corrosion.

#### Installation

- Fits opening widths 56-1/4" 59-5/8" (1429 1514 mm).
- 3-3/8" (86 mm) width adjustment.
- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

#### **Recommended Products/Accessories**

K-23723 Faucet cleaner



#### Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	SH	Bright Silver
	MX	Matte Nickel
	BL	Matte Black

## **Available Glass Options**


**Code Description** 

G81 Crystal Clear with Frosted Privacy Band





# Sliding bath door, 56-3/4" H x 56-1/4 - 59-5/8" W **K-707618-8G81**

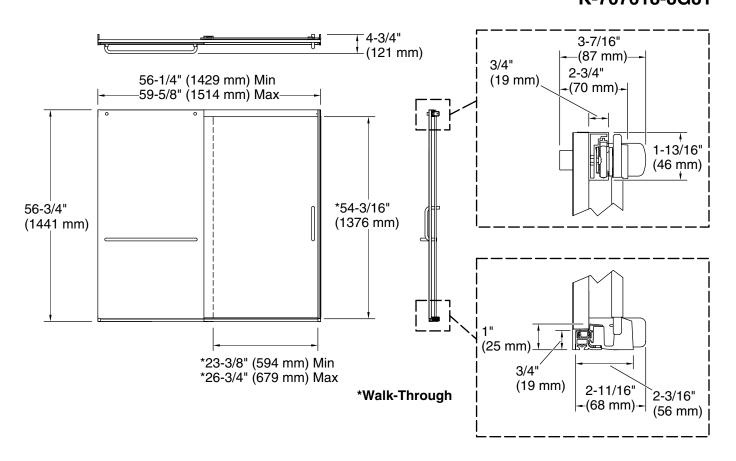

### **Technical Information**

All product dimensions are nominal.

Installation type: For bath installation Opening Width - 56-1/4" (1429 mm)

Min:

Opening Width - 59-5/8" (1514 mm)

Max:

Walk-through - Min: 23-3/8" (594 mm)
Walk-through - Max: 26-3/4" (679 mm)
Base-To-Wall 1/2" (13 mm)

Radius – Max:

Glass thickness: 5/16" (8 mm)
Glass coating: CleanCoat®

#### **Notes**

Install this product according to the installation instructions.

The vertical opening should be a minimum of 60-1/8" (1527 mm) to allow for installation clearance.

