
WS24332

Specification Sheet

Wall Sconce





Product Descriptions

Rectangular machined aluminum heat-sink. Lightly textured powder-coat finish. Inset opal polymeric diffuser. Adjustable directional light with rotational arm.

Product Details

High system efficacy. Low total life cycle cost. ETL Listed. 5-years warranty. Complete warranty terms located at: www.kuzcolighting.com/warranty

Utilizes our LED Driver Light Engine.

LED Driver within canopy.

Dimmable with ELV or TRIAC dimmer (not included)


Custom options available.



TYPE DATE

Voltage	Watt	LED Lumens	Delivered Lumens	Finish(es)	Color Temp	3000K
120V	33W*	2835lm*	850lm*	DIX - DIACK	CRI(Ra)	>90
120V	33W*	2835lm*	1090lm*		Dimming	100%-1
120V	33W*	2835lm*	1310lm*		Rated Life	50,000

^{*}Preliminary figures

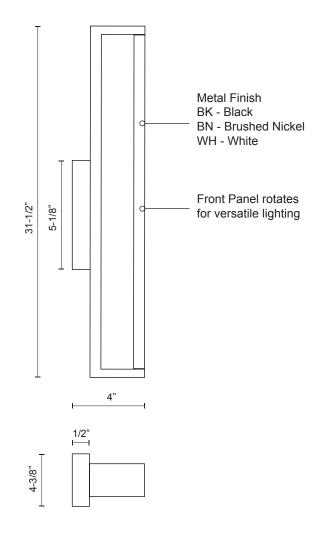

Comments:

>90 100%-10%

50,000 hours

Canopy dimensions:

L: 5-1/8"; W: 4-3/8"; H: 1/2"



T: 604 538 7162 F: 604 538 7196 W: Kuzcolighting.com

