


**NS-12
Surface Gimbal Ring**

Type
Project
Catalog No.
Lamp/Wattage

TRIM DIMENSIONS



Trim OD: 5"
Height: 1-5/8"

FEATURES

Trim
Metal trim with gimbal that can be adjusted up to 20°. Adjustable gimbal allows lamp to be mounted flush with trim.




Mounting
Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount lamp into gimbal ring.

Compatible Housings
Compatible with Line Voltage housings.
See individual specification sheets for more information.

Lamp
Line Voltage
50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings
cULus Listed for Damp Location when used with compatible housing.

HOUSING DIMENSIONS

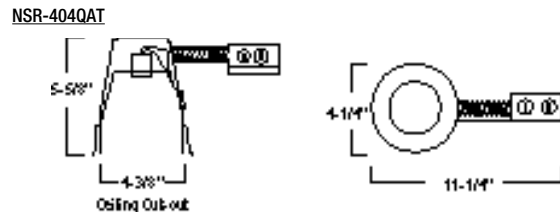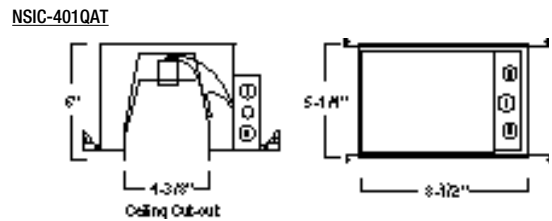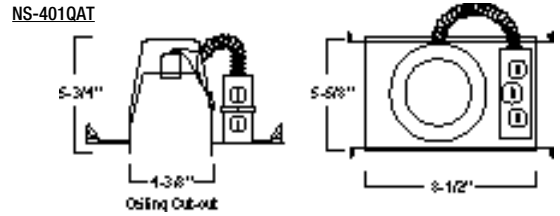

Surface Gimbal Ring

- NS-12BZ: Bronze Surface Gimbal Ring
- NS-12CO: Copper Surface Gimbal Ring
- NS-12N: Natural Metal Surface Gimbal Ring
- NS-12W: White Surface Gimbal Ring

Compatible Housings

LINE VOLTAGE			
Item Number	Installation Type	Lamp	Dimensions
NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"
NSRIC-404QAT	IC Air-Tight Remodel	50W	W: 4-5/8" L: 11-3/4" H: 6-1/4"