



Technical Sheet

Compat On-A-Wall

- PLF4CM
- PCM

Suggested Specification

Model PLF4CM shall deliver 4.0 gph of 50°F water at 90°F ambient and 80° F inlet water, per ASHRAE 18 testing. Model PCM is a non-refrigerated drinking fountain and delivers ambient water. Cabinet finish shall be greystone powder coated paint on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NS/ANSI 61 and NSF/ANSI 372.

Models

- PLF4CM delivers 4.0 gph of chilled drinking water
- PCM is a non-refrigerated fountain

Standard Features

- Dial-A-Drink® bubbler
- Waterways are Lead-Free in materials & construction
- Stainless steel top
- Welded heavy-gauge steel frame
- High efficiency cooling system

Finishes

- Standard cabinet finish: Greystone powder coated paint on galvanized steel
- Optional finishes: Sandstone powder coated paint; Stainless steel (at additional cost)

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.



Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/GSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "lead free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov




| Model | 50° F Drinking Water 90° F Ambient Air Temp* | | | Hot'N Cold™ Model | 115 Volts, 60 HZ | | | Glass Filler Acc. Option | Cabinet Color Finish | Net Wt. Approx. |
|--------|---|------------------|------------|-------------------------|------------------|-------------------|----------------|--------------------------------|----------------------------|--------------------|
| | Rated Capacity GPH | Base Rate GPH | Pre-Cooler | | Compr. HP | Full Load Amps | Rated Watts | | | |
| PLF4CM | 4.0 | 2.5 | Yes | No | 1/5 | 3.6 | 350 | No | No | 51 Lbs |
| PCM | Fountain Only | | | | | | | No | Yes | 24 Lbs |

*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® COMPACT ON-A-WALL WATER COOLERS MODELS

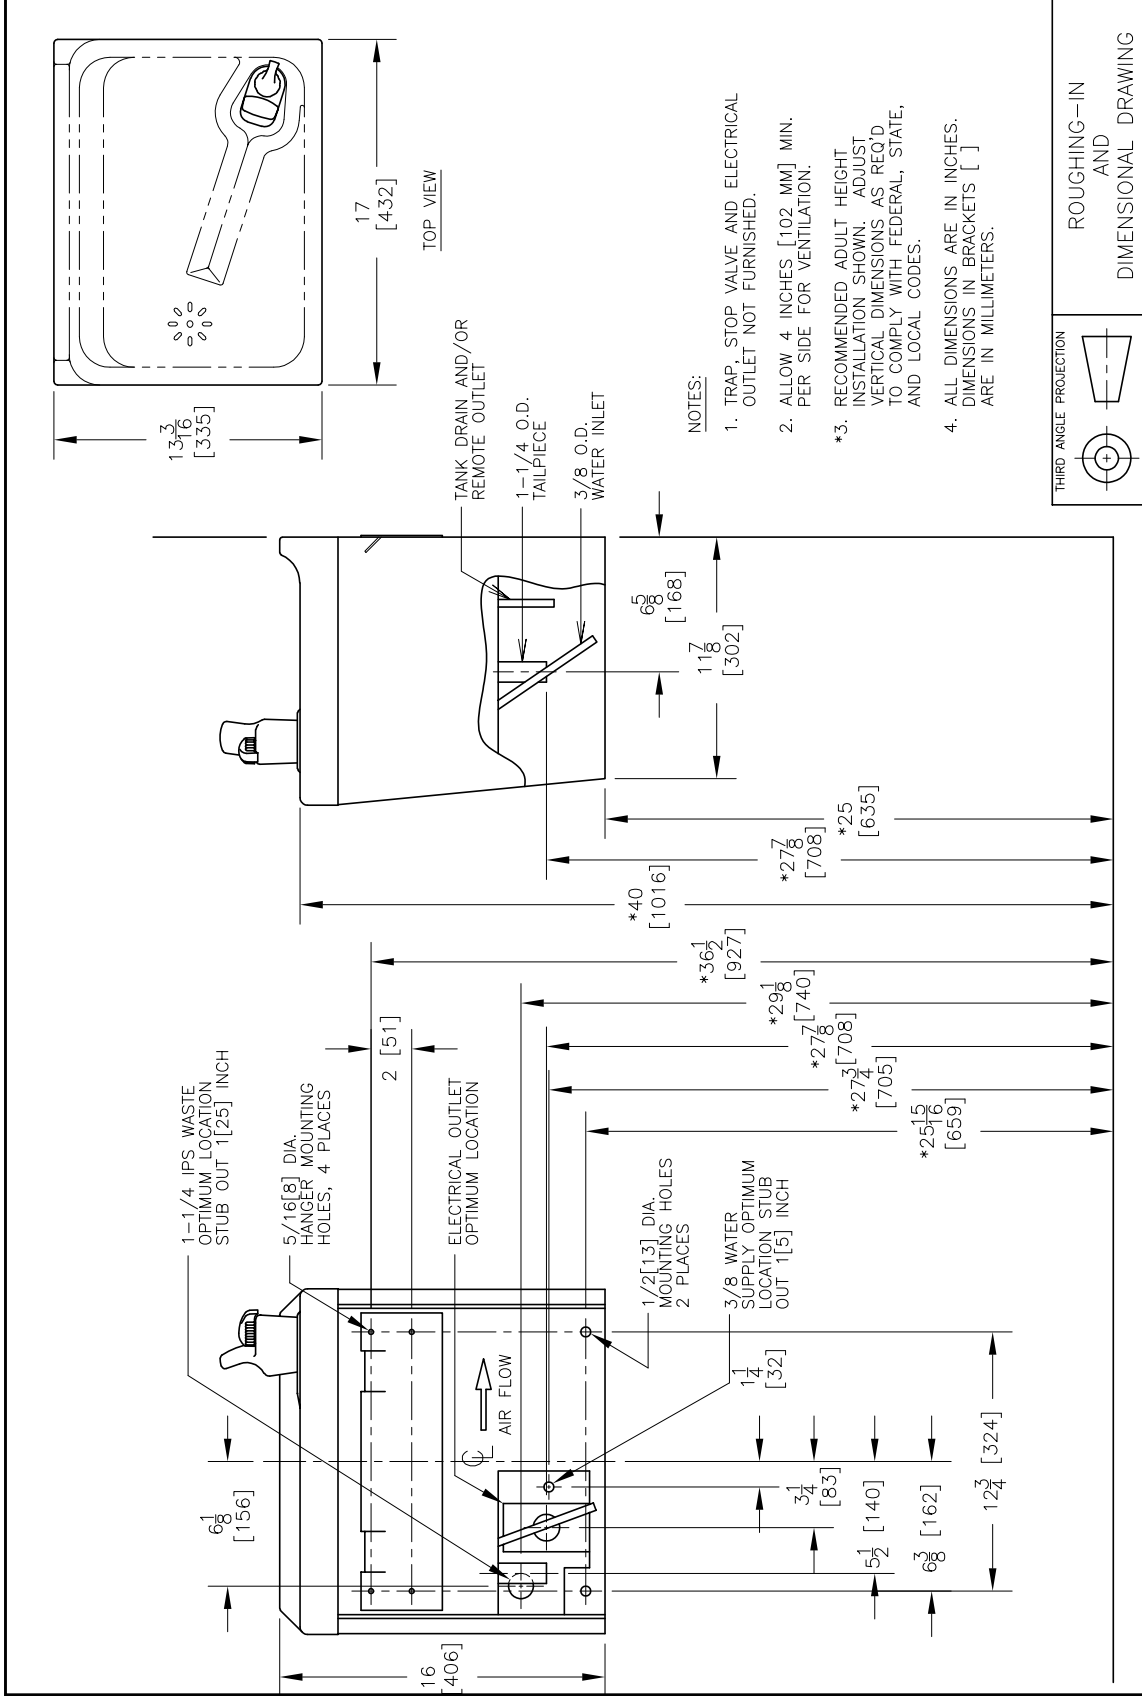

OASIS INTERNATIONAL www.oasiscoolers.com
 222 East Campus View Blvd.
 Columbus, OH 43235
1-800-646-2747

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International, © 2019 LVD Acquisition AS0015-F-1912