

**POLARIS Wall Sconce**  
**3-522-24**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-24 Satin Nickel

|                                    |  |
|------------------------------------|--|
| <b>LIGHT SOURCE</b>                | 1 x 12.1W LED, 3000K, CRI 90   |
| <b>LUMINAIRE POWER</b>             | 14.4W at 120V  |
| <b>RATED LIFE</b>                  | 60000 hr RL  |
| <b>OPTIONAL COLOR TEMPERATURES</b> | 2700K, 3500K, 4000K  |
| <b>LUMEN OUTPUT</b>                | Delivered: 1043 lm (LM-79)   |
| <b>INPUT VOLTAGE</b>               | 120V to 277V AC, 50/60Hz   |
| <b>DRIVER OUTPUT</b>               | 350mA, 14.7W max power   |
| <b>DIMMING</b>                     | TRIAC and ELV dimming at 120V AC;<br>0-10V dimming, 100% to 1% current output                        |
| <b>CONSTRUCTION</b>                | Plated Steel and Acrylic   |
| <b>DIFFUSER</b>                    | - Matte White Acrylic  |
| <b>FINISHES</b>                    | Satin Nickel (-24)   |
| <b>MOUNTING</b>                    | 4" Octagonal J-Box   |
| <b>STANDARDS</b>                   | UL Dry/Damp listed, ADA Compliant, Conforms to<br>UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0. |

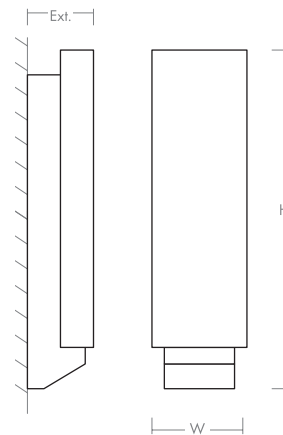

**DIMENSIONS**

|             |                                   |
|-------------|-----------------------------------|
| <b>W:</b>   | <b>5.75"</b>                      |
| <b>H:</b>   | <b>20.50"</b>                     |
| <b>Ext:</b> | <b>4.00"</b>                      |
| <b>M.C:</b> | <b>11.25" From top of fixture</b> |

Order example for standard fixture:

**3-522-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120V to 277V

Order example for optional color temperatures: **3-522-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

