


Pfirst Series™ Kitchen Faucet

- G136-2000 Finish(CC)
- G136-200S Finish(SS)
- G136-5000 Finish(CC)
- G136-500S Finish(SS)



Specifications

Features

- 1.8 GPM Flow Rate
- Lever Handle
- 3-Hole Installation (200* Only)
- 4-Hole Installation (500* Only)
- High Arc Spout
- Includes Matching Side Spray (500* Only)
- Chrome Side Spray (5000 Only)
- Stainless Steel Side Spray (500S Only)
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

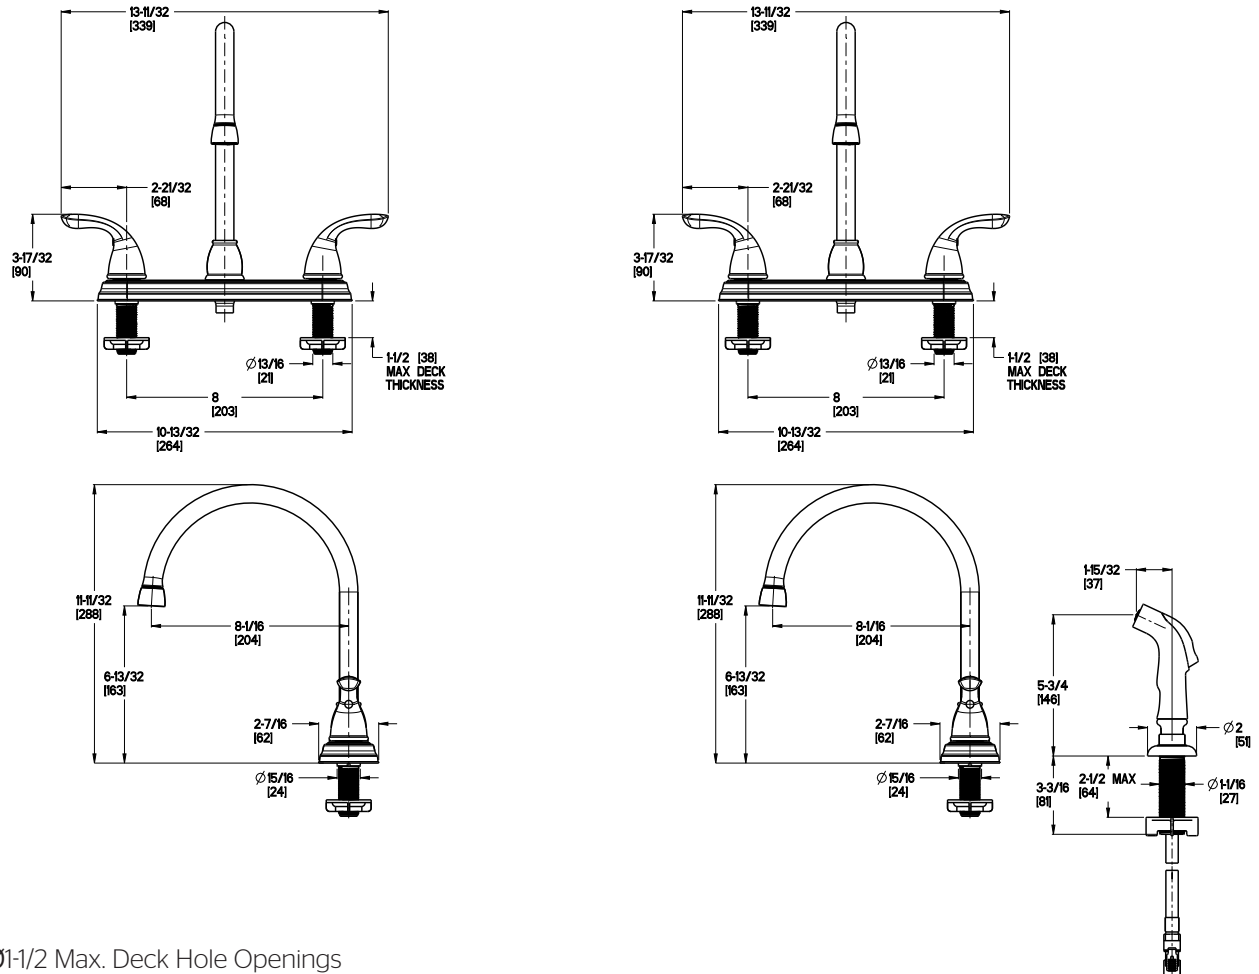

ϕ 1-3/8 Min to ϕ 1-1/2 Max. Deck Hole Openings