

LED Pendant

 Ceiling cord mounted • Dry location listed **PROGRESS LED**


Description:

One-light cord-hung pendant with an LED source that is neatly tucked inside a frosted acrylic shade. A light commercial pendant ideal for restaurants, bar and hotel applications.

Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- White polystyrene shade, White acrylic diffuser
- LED Module is replaceable (part # 93054049)
- Light commercial LED pendant.
- Ideal for restaurants, bar and hotel applications.
- 623 lumens 69.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	9w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	623/69.2 (LM-82)
Lumens/LPW (Delivered)	405/54 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Dry location listed ENERGY STAR® qualified

P5176-0930K9

Images:



Dimensions:

Diameter: 5-7/8"
 Height: 8-5/8"
 Overall Ht. W/Cord: 130"

Glass
 Width: 5-13/16"
 Length: 5-13/16"
 Height: 6-7/16"
 Glass 2
 Width: 2-7/8"
 Length: 2-7/8"
 Height: 0-13/16"

Photometrics:

P5176-0930K9

ELECTRICAL DATA	P5176-0930K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.075 A
Input Power	9
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P5176-0930K9

LED Light Engine: 3000 K 90 CRI

System Wattage: 9

Fixture delivered lumens: 405

Fixture Efficacy: 54


Spacing Criteria: 0.9

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	187	
5	186	18
15	181	51
25	129	59
35	58	38
45	39	30
55	31	27
65	26	25
75	22	23
85	20	21
90	19	
95	19	21
105	20	21
115	20	20
125	19	17
135	18	14
145	16	10
155	14	6
165	10	3
175	1	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	127	31.4
0-40	165	40.8
0-60	223	55.0
0-90	293	72.3
90-120	62	15.2
90-130	79	19.4
90-150	103	25.3
90-180	112	27.7
0-180	405	100.0

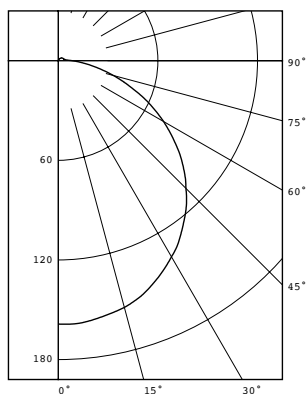

Test 15.01356 Test Date 7/28/15

P5176-0930K9

Dimming Notes:

P5176 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vierti VTELV-600

Lutron Ariadni AYCL-153P

Lutron Diva DVCL-153P

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.