

PCISW - LED SERIES

LED Stairwell Luminaire

Specifications:


Features:

- Energy saving luminaire with integrated occupancy controls
- Long-life 50,000 hour LEDs at L70 for reduced maintenance
- 5000 Lumens
- Occupancy controlled dimming of the LEDs increases energy savings while maintaining base light levels in stairwells at all times
- White aluminum body provides excellent heat dissipation
- Tool-less access to ballast electrical components for ease of maintenance
- Fail safe operation switches light level to 100% if sensor is damaged
- Occupancy sensor has a 360° coverage area at a height of 10 ft and a 2:1 radius to height ratio coverage pattern
- Step dimming driver
- Universal input voltage 120-277 VAC, 50/60Hz

Compliances:

PCISW – LED Series are built to UL 1598 and 2108 standards, and bear appropriate CSA labels. Damp location labeling is standard.

Dimensions:

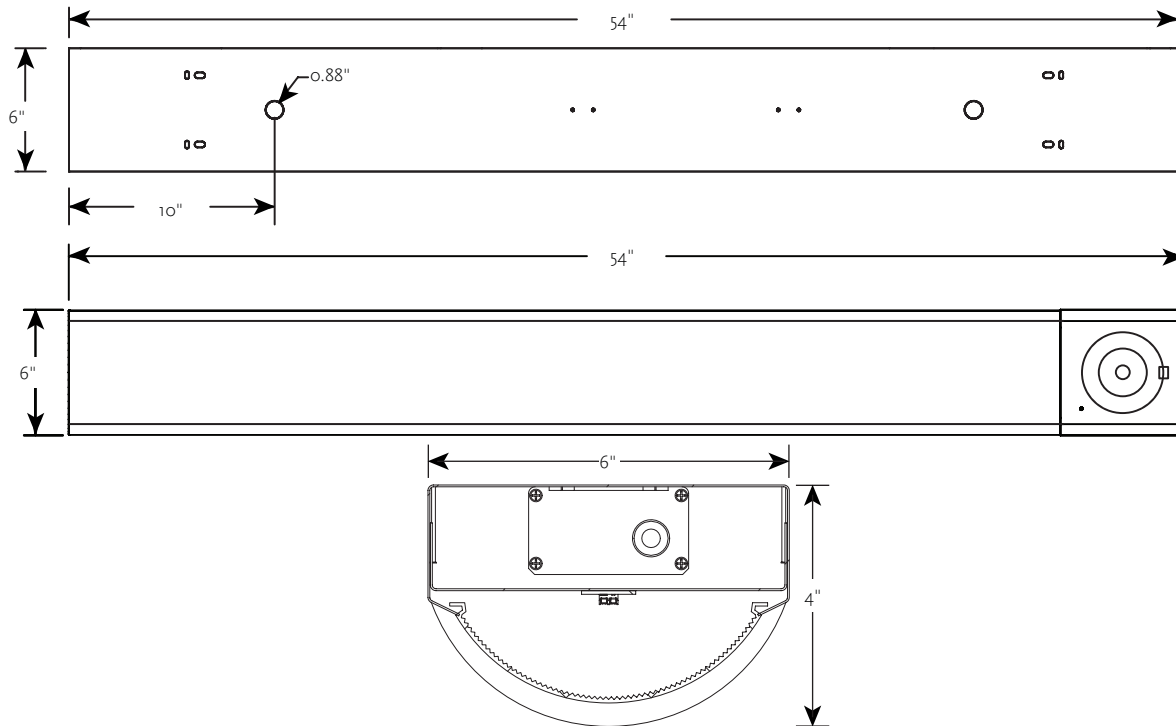

Images:



Warranty:

5 year warranty (Terms and Conditions Apply)

Catalog number:

Base	Lamp Type	Size	Color Temperature
PCISW	LED	4 - 4'	35K - 3500K

PCISW - LED SERIES

LED Stairwell Luminaire

Photometric Data:

PCISW-LED-4-35K	
Fixture Lumens	5726
Watts	50.40
Mounting	SURFACE
Shielding Angle	0° = 90 90° =90
Spacing Criterion	0° =1.19 90° =1.28
Luminous Option (LxWxH)	4.00' x 0.38' x 0.17'

Zonal Lumen Summary PCISW-LED-4-35K			
Zone	Lumens	% Lamp	%Fixt
0-30	1271	24.1	24.1
0-40	2073	39.3	39.3
0-60	3635	68.9	68.9
0-90	4939	93.6	93.6
0-180	5276	100.0	100.0

Energy Data PCISW-LED-4-35K	
Total Luminance Efficiency	100.0%
Total Luminance per Watt	105
ANSI/IESNA RP-1-2004 Compliance	Noncompliant

INDOOR CANDELA PLOT

