


TUBE ARCHITECTURAL DS-WS05

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input: Universal voltage 120V - 277VAC, 50/60Hz
Dimming: Electronic low voltage (ELV) : 100% - 5% (120V only)
 0-10V: 100% - 1% (120-277V)
Light Source: High output 3 Step Mac Adam Ellipse COB
 Rated life of 60,000 hours at L70
Finish: Electrostatically powder coated, white, black, bronze and graphite
Standards: IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with *)
Operating Temp: -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish		
DS-WS05	5"	27W	S Straight up or down	18°	927S	2700K	90	1680	8526	62		BK Black WT White BZ Bronze GH Graphite
					27S	2700K	85	1800	9151	67		
					930S	3000K	90	1700	8639	63		
					30S	3000K	85	1995	10126	74		
					35S	3500K	85	2190	11118	81		
					40S	4000K	85	2260	11483	84		
			N Straight up or down	25°	927S	2700K	90	1730	5513	64		
					27S	2700K	85	1855	5918	69		
					930S	3000K	90	1750	5587	65		
					30S	3000K	85	2055	6548	76		
					35S	3500K	85	2255	7190	84		
					40S	4000K	85	2330	7426	86		
			F Straight up or down	33°	927S	2700K	90	1725	4246	64		
					27S	2700K	85	1850	4557	69		
					930S	3000K	90	1745	4302	65		
					30S	3000K	85	2045	5043	76		
					35S	3500K	85	2245	5537	83		
					40S	4000K	85	2320	5719	86		
			F Away from the wall	N/A	927A	2700K	90	1815		67		
					27A*	2700K	85	1950		72		
930A	3000K	90			1840	N/A	68					
30A*	3000K	85			2155		80					
35A*	3500K	85			2370		88					
40A*	4000K	85			2445		91					
F Towards the wall	N/A	927B	2700K	90	1815		67					
		27B*	2700K	85	1950		72					
		930B	3000K	90	1840	N/A	68					
		30B*	3000K	85	2155		80					
		35B*	3500K	85	2370		88					
		40B*	4000K	85	2445		91					

DS-WS05-_____-_____-_____-

Example: DS-WS05-F930A-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WS06

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input: Universal voltage 120V - 277VAC, 50/60Hz
Dimming: Electronic low voltage (ELV) : 100% - 5% (120V only)
 0-10V: 100% - 1% (120-277V)
Light Source: High output 3 Step Mac Adam Ellipse COB
 Rated life of 70,000 hours at L70
Finish: Electrostatically powder coated, white, black, bronze and graphite
Standards: IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with *)
Operating Temp: -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish	
DS-WS06	6" 36W	S Straight up or down	16°	927S	2700K	90	2420	15955	69		BK Black WT White BZ Bronze GH Graphite
				27S	2700K	85	3105	20455	89		
				930S	3000K	90	2572	16977	74		
				30S	3000K	85	3195	21068	91		
				35S	3500K	85	3350	22091	96		
				40S	4000K	85	3385	22296	97		
		N Straight up or down	29°	927S	2700K	90	2385	6872	68		
				27S	2700K	85	3055	8694	87		
				930S	3000K	90	2535	7216	72		
				30S	3000K	85	3150	8955	90		
				35S	3500K	85	3300	9390	94		
				40S	4000K	85	3330	9477	95		
		F Straight up or down	37°	927S	2700K	90	2385	4859	68		
				27S	2700K	85	3060	6229	87		
				930S	3000K	90	2540	5170	73		
				30S	3000K	85	3150	6416	90		
				35S	3500K	85	3305	6727	94		
				40S	4000K	85	3335	6790	95		
		F Away from the wall	N/A	927A	2700K	90	2505		72		
				27A*	2700K	85	3215		92		
				930A	3000K	90	2670	N/A	76		
				30A*	3000K	85	3310		95		
				35A*	3500K	85	3470		99		
				40A*	4000K	85	3505		100		
F Towards the wall	N/A	927B	2700K	90	2505		72				
		27B*	2700K	85	3215		92				
		930B	3000K	90	2670	N/A	76				
		30B*	3000K	85	3310		95				
		35B*	3500K	85	3470		99				
		40B*	4000K	85	3505		100				

DS-WS06-_____ - _____

Example: DS-WS06-F930A-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WS08

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input:	Universal voltage 120V - 277VAC, 50/60Hz
Dimming:	Electronic low voltage (ELV) : 100% - 5% (120V only) 0-10V: 100% - 1% (120-277V)
Light Source:	High output 3 Step Mac Adam Ellipse COB Rated life of 65,000 hours at L70
Finish:	Electrostatically powder coated, white, black, bronze and graphite
Standards:	IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with *)
Operating Temp:	-13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish	
DS-WS08	8" 48W	S Straight up or down	18°	927S	2700K	90	3075	16382	64		BK Black WT White BZ Bronze GH Graphite
				27S	2700K	85	3540	18856	74		
				930S	3000K	90	2975	15847	62		
				30S	3000K	85	3615	19254	75		
				35S	3500K	85	3855	20525	80		
				40S	4000K	85	3915	20847	82		
		N Straight up or down	21°	927S	2700K	90	3075	11830	64		
				27S	2700K	85	3540	13616	74		
				930S	3000K	90	2975	11443	62		
				30S	3000K	85	3615	13903	75		
				35S	3500K	85	3850	14821	80		
				40S	4000K	85	3910	15053	82		
		F Straight up or down	35°	927S	2700K	90	3035	6200	64		
				27S	2700K	85	3495	7136	73		
				930S	3000K	90	2935	5997	50		
				30S	3000K	85	3565	7287	74		
				35S	3500K	85	3805	7768	79		
				40S	4000K	85	3806	7889	80		
		F Away from the wall	N/A	927A	2700K	90	2870		60		
				27A*	2700K	85	3305		69		
				930A	3000K	90	2775	N/A	58		
				30A*	3000K	85	3375		70		
				35A*	3500K	85	3595		75		
				40A*	4000K	85	3655		76		
F Towards the wall	N/A	927B	2700K	90	2870		60				
		27B*	2700K	85	3305		69				
		930B	3000K	90	2775	N/A	58				
		30B*	3000K	85	3375		70				
		35B*	3500K	85	3595		75				
		40B*	4000K	85	3655		76				

DS-WS08-_____ - _____

Example: DS-WS08-F930A-WT

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122


Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

TUBE ARCHITECTURAL DS-WD05

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

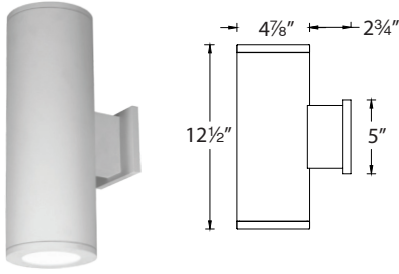

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input: Universal voltage 120V - 277VAC, 50/60Hz
Dimming: Electronic low voltage (ELV) : 100% - 5% (120V only)
 0-10V: 100% - 1% (120-277V)
Light Source: High output 3 Step Mac Adam Ellipse COB
 Rated life of 60,000 hours at L70
Finish: Electrostatically powder coated, white, black, bronze and graphite
Standards: IP65 rated, ETL & cETL wet location listed
Operating Temp: -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color	Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish
DS-WD05	5" 27W x2	S Straight up and down	18°	927S	2700K	90	1680 x 2	8526 x 2	62 x 2		
				27S	2700K	85	1800 x 2	9151 x 2	67 x 2		
				930S	3000K	90	1700 x 2	8639 x 2	63 x 2		
				30S	3000K	85	1995 x 2	10126 x 2	74 x 2		
				35S	3500K	85	2190 x 2	11118 x 2	81 x 2		
				40S	4000K	85	2260 x 2	11483 x 2	84 x 2		
		N Straight up and down	25°	927S	2700K	90	1730 x 2	5513 x 2	64 x 2		
				27S	2700K	85	1855 x 2	5918 x 2	69 x 2		
				930S	3000K	90	1750 x 2	5587 x 2	65 x 2		
				30S	3000K	85	2055 x 2	6548 x 2	76 x 2		
				35S	3500K	85	2255 x 2	7190 x 2	84 x 2		
				40S	4000K	85	2330 x 2	7426 x 2	86 x 2		
		F Straight up and down	33°	927S	2700K	90	1725 x 2	4246 x 2	64 x 2		
				27S	2700K	85	1850 x 2	4557 x 2	69 x 2		
				930S	3000K	90	1745 x 2	4302 x 2	65 x 2		
				30S	3000K	85	2045 x 2	5043 x 2	76 x 2		
				35S	3500K	85	2245 x 2	5537 x 2	83 x 2		
				40S	4000K	85	2320 x 2	5719 x 2	86 x 2		
		F Away from the wall	N/A	927A	2700K	90	1815 x 2		67 x 2		
				27A	2700K	85	1950 x 2		72 x 2		
				930A	3000K	90	1840 x 2	N/A	68 x 2		
				30A	3000K	85	2155 x 2		80 x 2		
				35A	3500K	85	2370 x 2		88 x 2		
				40A	4000K	85	2445 x 2		91 x 2		
F Towards the wall	N/A	927B	2700K	90	1815 x 2		67 x 2				
		27B	2700K	85	1950 x 2		72 x 2				
		930B	3000K	90	1840 x 2	N/A	68 x 2				
		30B	3000K	85	2155 x 2		80 x 2				
		35B	3500K	85	2370 x 2		88 x 2				
		40B	4000K	85	2445 x 2		91 x 2				
F One side each	N/A	927C	2700K	90	1815 x 2		67 x 2		One side away from wall, one side towards the wall		
		27C	2700K	85	1950 x 2		72 x 2				
		930C	3000K	90	1840 x 2	N/A	68 x 2				
		30C	3000K	85	2155 x 2		80 x 2				
		35C	3500K	85	2370 x 2		88 x 2				
		40C	4000K	85	2445 x 2		91 x 2				

BK	Black	
WT	White	
BZ	Bronze	
GH	Graphite	

DS-WD05-_____ - _____ Example: DS-WD05-F930A-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

TUBE ARCHITECTURAL DS-WD06

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

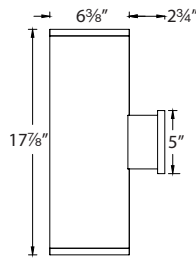

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5% (120V only)
0-10V: 100% - 1% (120-277V)
- Light Source:** High output 3 Step Mac Adam Ellipse COB
Rated life of 70,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed
- Operating Temp:** -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish	
DS-WD06	6" 36W x 2	S Straight up and down	16°	927S	2700K	90	2420 x 2	15955 x 2	69 x 2		BK Black WT White BZ Bronze GH Graphite
				27S	2700K	85	3105 x 2	20455 x 2	89 x 2		
				930S	3000K	90	2572 x 2	16977 x 2	74 x 2		
				30S	3000K	85	3195 x 2	21068 x 2	91 x 2		
				35S	3500K	85	3350 x 2	22091 x 2	96 x 2		
				40S	4000K	85	3385 x 2	22296 x 2	97 x 2		
		N Straight up and down	29°	927S	2700K	90	2385 x 2	6872 x 2	68 x 2		
				27S	2700K	85	3055 x 2	8694 x 2	87 x 2		
				930S	3000K	90	2535 x 2	7216 x 2	72 x 2		
				30S	3000K	85	3150 x 2	8955 x 2	90 x 2		
				35S	3500K	85	3300 x 2	9390 x 2	94 x 2		
				40S	4000K	85	3330 x 2	9477 x 2	95 x 2		
		F Straight up and down	37°	927S	2700K	90	2385 x 2	4859 x 2	68 x 2		
				27S	2700K	85	3060 x 2	6229 x 2	87 x 2		
				930S	3000K	90	2540 x 2	5170 x 2	73 x 2		
				30S	3000K	85	3150 x 2	6416 x 2	90 x 2		
				35S	3500K	85	3305 x 2	6727 x 2	94 x 2		
				40S	4000K	85	3335 x 2	6790 x 2	95 x 2		
		F Away from the wall	N/A	927A	2700K	90	2505 x 2		72 x 2		
				27A	2700K	85	3215 x 2	N/A	92 x 2		
				930A	3000K	90	2670 x 2		76 x 2		
				30A	3000K	85	3310 x 2		95 x 2		
				35A	3500K	85	3470 x 2		99 x 2		
				40A	4000K	85	3505 x 2		100 x 2		
F Towards the wall	N/A	927B	2700K	90	2505 x 2		72 x 2				
		27B	2700K	85	3215 x 2	N/A	92 x 2				
		930B	3000K	90	2670 x 2		76 x 2				
		30B	3000K	85	3310 x 2		95 x 2				
		35B	3500K	85	3470 x 2		99 x 2				
		40B	4000K	85	3505 x 2		100 x 2				
F One side each	N/A	927C	2700K	90	2505 x 2		72 x 2	One side away from wall, one side towards the wall			
		27C	2700K	85	3215 x 2	N/A	92 x 2				
		930C	3000K	90	2670 x 2		76 x 2				
		30C	3000K	85	3310 x 2		95 x 2				
		35C	3500K	85	3470 x 2		99 x 2				
		40C	4000K	85	3505 x 2		100 x 2				

DS-WD06-_____ - _____ Example: DS-WD06-F930A-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122


Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

TUBE ARCHITECTURAL DS-WD08

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

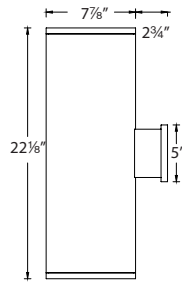

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input:	Universal voltage 120V - 277VAC, 50/60Hz
Dimming:	Electronic low voltage (ELV) : 100% - 5% (120V only) 0-10V: 100% - 1% (120-277V)
Light Source:	High output 3 Step Mac Adam Ellipse COB Rated life of 65,000 hours at L70
Finish:	Electrostatically powder coated, white, black, bronze and graphite
Standards:	IP65 rated, ETL & cETL wet location listed
Operating Temp:	-13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish	
DS-WD08	8" 48W x 2	S Straight up and down	18°	27S	2700K	85	3540 x 2	18856	74 x 2		BK Black WT White BZ Bronze GH Graphite
				927S	2700K	90	3075 x 2	16382	64 x 2		
				30S	3000K	85	3615 x 2	19254	75 x 2		
				930S	3000K	90	2975 x 2	15847	62 x 2		
				35S	3500K	85	3855 x 2	20525	80 x 2		
				40S	4000K	85	3915 x 2	20817	82 x 2		
		N Straight up and down	21°	27N	2700K	85	3540 x 2	13616	74 x 2		
				927N	2700K	90	3075 x 2	11830	64 x 2		
				30N	3000K	85	3615 x 2	13903	75 x 2		
				930N	3000K	90	2975 x 2	11443	62 x 2		
				35N	3500K	85	3855 x 2	14821	80 x 2		
				40N	4000K	85	3915 x 2	15053	82 x 2		
		F Straight up and down	35°	27F	2700K	85	3495 x 2	7136	73 x 2		
				927F	2700K	90	3035 x 2	6200	64 x 2		
				30F	3000K	85	3565 x 2	7287	74 x 2		
				930F	3000K	90	2935 x 2	5997	50 x 2		
				35F	3500K	85	3850 x 2	7768	79 x 2		
				40F	4000K	85	3910 x 2	7889	80 x 2		
		F Away from the wall	N/A	27A	2700K	85	3305 x 2	N/A	69 x 2		
				927A	2700K	90	2870 x 2	N/A	60 x 2		
				30A	3000K	85	3375 x 2	N/A	70 x 2		
				930A	3000K	90	2775 x 2	N/A	58 x 2		
				35A	3500K	85	3595 x 2	N/A	75 x 2		
				40A	4000K	85	3655 x 2	N/A	76 x 2		
F Towards the wall	N/A	27B	2700K	85	3305 x 2	N/A	69 x 2				
		927B	2700K	90	2870 x 2	N/A	60 x 2				
		30B	3000K	85	3375 x 2	N/A	70 x 2				
		930B	3000K	90	2775 x 2	N/A	58 x 2				
		35B	3500K	85	3595 x 2	N/A	75 x 2				
		40B	4000K	85	3655 x 2	N/A	76 x 2				
F One side each	N/A	27C	2700K	85	3305 x 2	N/A	69 x 2	One side away from wall, one side towards the wall			
		927C	2700K	90	2870 x 2	N/A	60 x 2				
		30C	3000K	85	3375 x 2	N/A	70 x 2				
		930C	3000K	90	2775 x 2	N/A	58 x 2				
		35C	3500K	85	3595 x 2	N/A	75 x 2				
		40C	4000K	85	3655 x 2	N/A	76 x 2				

DS-WD08-_____ - _____ Example: DS-WD08-F930A-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760