

OCULUX 2" LED RECESSED

R2BRA, R2BSA, R2BRA-11, R2BSA-11

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Designed to fit in tight plenum space

FEATURES

- Energy Star® Rated
- Title 24 Compliant
- Cutout: 3 $\frac{3}{16}$ "
- Single spot light source
- Sold as new construction, may be reconfigured in the field for remodel
- ELV or TRIAC or 0-10V dimming compatible

SPECIFICATIONS

Construction:	Die-cast aluminum trim with aluminum heat sink
Dimming:	100% - 5% with 0-10V dimmer 100% - 5% with Electronic Low Voltage (ELV) dimmer
Input:	120V AC
Power:	9W/11W, power factor 0.98
Finish:	Powder coated
Standards:	ETL & cETL Listed, damp location listed trims IC-rated airtight housing
Ceiling thickness:	$\frac{1}{2}$ " - 1"
Operating Temperature:	-4°F to 104°F (20°C to 40°C)

TRIM (SEE NEXT PAGE FOR HOUSING)	Model	Power	Beam	Color Temp	CRI	Lumen	CBCP	Finish	Interior/Trim
<p>R2BRA Round 0 - 35° Adjustable 45° visual cutoff</p>	9W	S 15°	927	2700K	90	535	3131	HZWT BN WT	Haze/White Brushed Nickel White
			930	3000K	90	555	3245		
			N 25°	927	2700K	90	635		
	930	3000K	90	680	2123				
	F 45°	927	2700K	90	640	1053			
	930	3000K	90	685	1127				
<p>R2BRA-11 Round 0 - 35° Adjustable 45° visual cutoff</p>	11W	S 15°	927	2700K	90	860	4293	HZWT BN WT	Haze/White Brushed Nickel White
			930	3000K	90	935	4666		
			N 25°	927	2700K	90	930		
	930	3000K	90	980	2683				
	F 45°	927	2700K	90	955	1349			
	930	3000K	90	1005	1420				
<p>R2BSA Square 0 - 35° Adjustable 45° visual cutoff</p>	9W	S 15°	927	2700K	90	535	3131	HZWT BN WT	Haze/White Brushed Nickel White
			930	3000K	90	555	3245		
			N 25°	927	2700K	90	635		
	930	3000K	90	680	2123				
	F 45°	927	2700K	90	640	1053			
	930	3000K	90	685	1127				
<p>R2BSA-11 Square 0 - 35° Adjustable 45° visual cutoff</p>	11W	S 15°	927	2700K	90	860	4293	HZWT BN WT	Haze/White Brushed Nickel White
			930	3000K	90	935	4666		
			N 25°	927	2700K	90	930		
	930	3000K	90	980	2683				
	F 45°	927	2700K	90	955	1349			
	930	3000K	90	1005	1420				

R2BSA- _____ - _____ - _____

Example: **R2BSA-11-N930-BN**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

OCULUX 2" LED RECESSED

R2BRA, R2BSA, R2BRA-11, R2BSA-11


WAC LIGHTING

Responsible Lighting®

INTEGRAL HOUSING AND TRIM: BOTH NEW CONSTRUCTION & REMODEL


NEW CONSTRUCTION CONFIGURATION

IC-Rated, Airtight

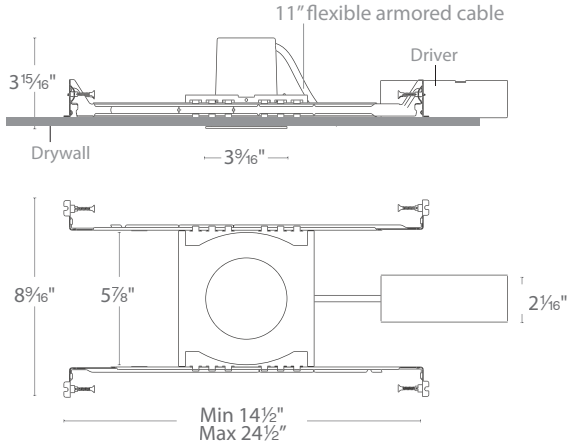

REMODEL CONFIGURATION

IC-Rated, Airtight

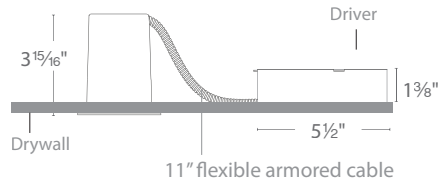

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760