ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

40070

LIVEX® LIGHTING EST. 1993

◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.

2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be care not to lose any small parts necessary for installation.

3. Attach the crossbar to the Junction Box with the two junction box screws as shown. The side of the cross bar marked "GND" must face out. **The junction box is not included.**

4. While holding the lamp body(C) towards the ceiling, connect the electrical wires as Shown in **Fig.2,** making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting plate with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.

5. Install lamp body(C) onto the junction box, aligning screw hole on crossbar with mounting holes in canopy and lock it securely with the screws (D).

6. Install the light bulbs(not included) in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**

7. Raise the end screw of the garnish cluster(B) and(A) insert to the screw hole of lamp body(C), by turn it clockwise until tight. **Note: the garnish cluster(B) and(A) must evenly spaced distribution on the every lap.**

Your installation is now complete. Return power to the junction box and test the fixture.
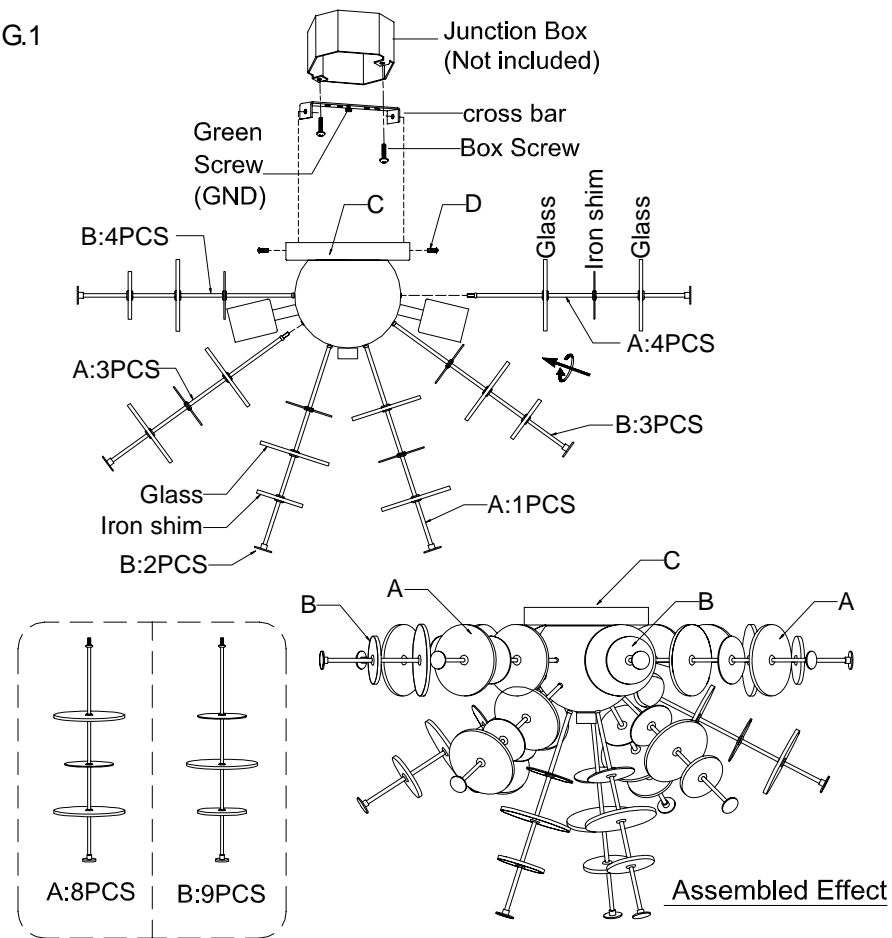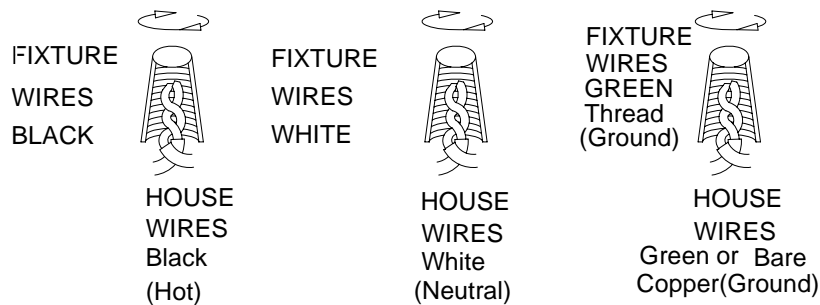
FIG.1

Junction Box (Not included)
cross bar
Green Screw (GND)
Box Screw
B:4PCS
C
D
Glass
Iron shim
Glass
A:4PCS
A:3PCS
B:3PCS
Glass
Iron shim
A:1PCS
B:2PCS

A:8PCS | B:9PCS

B A C B A
Assembled Effect

FIG.2

FIXTURE WIRES BLACK — HOUSE WIRES Black (Hot)

FIXTURE WIRES WHITE — HOUSE WIRES White (Neutral)

FIXTURE WIRES GREEN Thread (Ground) — HOUSE WIRES Green or Bare Copper(Ground)