

## **SAFETY INFORMATION**

Please read and understand this entire manual before attempting to assemble, install or operate the product.


### **WARNING**

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

### **CAUTION**

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

### **TOOLS REQUIRED**

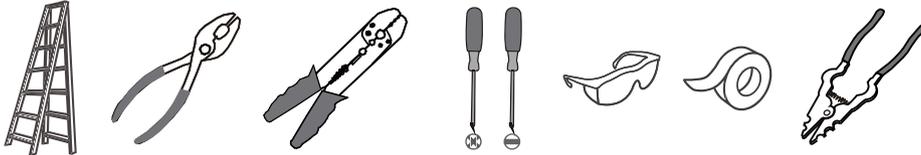


## **CARE AND MAINTENANCE**


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at [www.quoizel.com](http://www.quoizel.com).

## **PACKAGE CONTENTS**

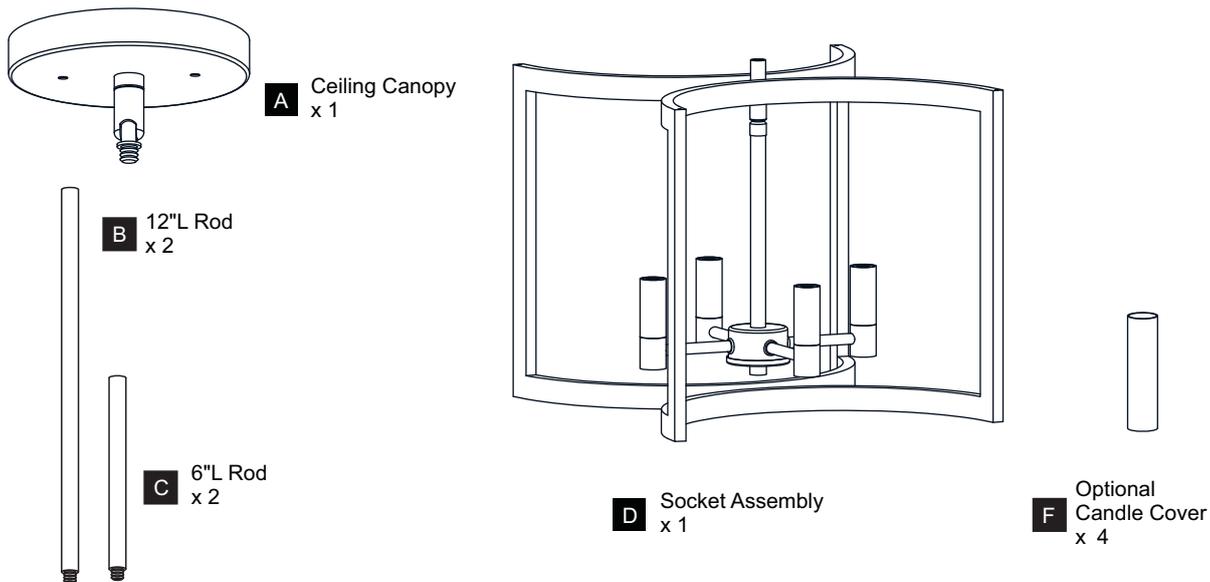

## **MOUNTING HARDWARE**

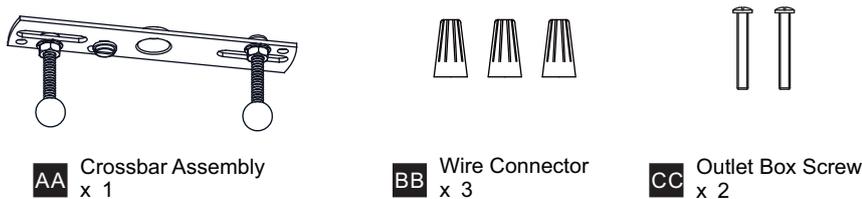


# INSTALLATION

**IMPORTANT:** This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. **DO NOT CUT SUPPLY WIRES** if you intend to use it as pendant light.

## OPTION 1: SEMI-FLUSH BEU1712OZ

\* Set aside (2) 6"L Rods and (2) 12"L Rods since they are not required for the semi-flush installation.



### 1 Remove Swivel

Set aside swivel

### 2 Install Ceiling Canopy

### 3 Install Crossbar Assembly

### 4 Wiring

White wire from supply      White from fixture

Black (or red) wire from supply      Black from fixture

Ground wire from supply      Ground wire from fixture

Green ground screw

### 5 Install Ceiling Canopy to Crossbar Assembly

### 6 Install Bulbs

Install four correct bulbs referring to fixture markings and/or labels for maximum wattage.

**Recommended Bulb Type (not included):**

 BULB BASE TYPE Candelabra (E12)	 BULB SHAPE TYPE B
--	--------------------------

\* Remove Candle Covers on the Sockets, replace them with Optional Candle Covers if you want.

Candle Cover

Optional Candle Cover

# INSTALLATION

## OPTION 2: PENDANT BEU1512OZ

**1 Install Rods**

Optional Rods:  
 8 Feet Ceiling:  
 (2) 12"L Rods.  
 9 Feet Ceiling:  
 (2) 6"L Rods + (2) 12"L Rods.

**2 Tighten hex nut inside of the ceiling canopy**

**3 Install Ceiling Canopy to Upper Rod**

**4 Install Crossbar Assembly**

Outlet Box

**5 Wiring**

White wire from supply      White from fixture  
 Black (or red) wire from supply      Black from fixture  
 Ground wire from supply      Ground wire from fixture  
 Green ground screw

**6 Install Ceiling Canopy to Crossbar Assembly**

90Degree Swivel

For angled ceilings,  
 Swivel opening towards wall.

**7 Install Bulbs**

Install four correct bulbs referring to fixture markings and/or labels for maximum wattage.

\* Remove Candle Covers on the Sockets, replace them with Optional Candle Covers if you want.

Optional Candle Cover

Recommended Bulb Type (not included):

BULB BASE TYPE: Candelabra (E12)  
 BULB SHAPE: TYPE B  
 60W

Candle Cover

Your installation is now complete! Restore electricity and save this sheet for future reference.